


Regulated power supply



- Din rail mounted
- Optional battery charging on all units
- High efficiency
- Fully protected
- Current limited
- Thermally protected
- No minimum load requirement
- CE marked

inlec switch mode power supply units use efficient flyback technology to give a universal input with adjustable outputs of 12 or 24v DC.

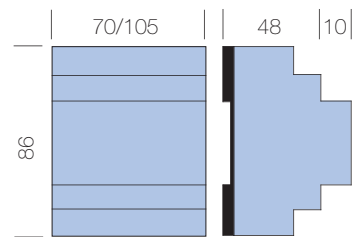

specifications

input voltage	100 - 264v
input frequency	45 - 450Hz
output voltage adjustable	12 - 14v DC 24 - 28v DC
load regulation	
static	± 0.5%
dynamic	5% - 100% load, recovers within 10 milliseconds
ripple	1% Pk to Pk
efficiency	
universal input	80%
230v input	85%
output LED	yes
primary fuse	yes
secondary protection	electronic and thermal limiting

part no	sizes mm	rating watts	output volts
INL 12/15	105 x 86 x 58	15	12
INL 12/30	105 x 86 x 58	30	12
INL 12/45	105 x 86 x 58	45	12
INL 12/60	105 x 86 x 58	60	12
INL 24/15	70 x 86 x 58	15	24
INL 24/30	70 x 86 x 58	30	24
INL 24/45	105 x 86 x 58	45	24
INL 24/60	105 x 86 x 58	60	24



Units 3/4 Station Yard Industrial Estate
Old Furness Road
Coniston
Cumbria
LA21 8HU



t: +44 (0) 15394 41904
f: +44 (0) 15394 41907
e: info@boardman-transformers.co.uk
w: www.boardman-transformers.co.uk